

Technical drawing of a mechanical part, showing a cross-section A-A and a top view.

Cross-section A-A:

- Overall length: 22
- Left section: 6
- Central section: 22
- Right section: 16
- Overall diameter: $\phi 28$
- Central hole diameter: $\phi 24.5$
- Inner hole diameter: $\phi 10^{+0.049}_{+0.013}$
- Small hole diameter: $2-\phi 5.5$
- Surface finish: 3.2
- Dimensional tolerances: $9^{+0.05}_{-0.10}$, $9^{+0.2}_{+0.4}$
- Feature control frame: $\phi 10$ 0.10 A
- Feature control frame: 0.03 A
- Feature control frame: 0.02 A

Top View:

- Overall width: 69
- Overall height: 32
- Central hole diameter: 49
- Small hole diameter: 16
- Small hole diameter: 8
- Surface finish: 3.2
- Section line A-A

[illegible][illegible]

The technical drawing consists of two views of a mechanical component.

Cross-section A-A:

- Overall width: $\phi 28$.
- Central hole diameter: $\phi 10^{+0.049}_{+0.013}$.
- Outer diameter of the central section: $\phi 24.5$.
- Two holes on the left: $2-\phi 10$ and $2-\phi 5.5$.
- Surface texture symbols (R_a): 0.03 A on the left flange, 0.10 A on the top surface of the central section, and 0.02 A on the right flange.
- Dimensional tolerances: $9^{-0.05}_{-0.10}$ and $9^{+0.2}_{+0.4}$ are indicated on the right side.
- Surface finish symbol: 3.2 is shown on several surfaces.

Front View:

- Overall width: 69.
- Top width: 49.
- Bottom width: 49.
- Height dimensions from bottom: 8, 16, 22, 32.
- Section line A-A passes through the center.
- Surface texture symbol: 3.2 is shown on the top and bottom surfaces.

[illegible][illegible]

6.3

A—A

2- $\phi 10$

2- $\phi 5.5$

$\phi 24.5$

$\phi 10^{+0.049}_{+0.013}$

$\phi 28$

0.03 A

0.10 A

0.02 A

3.2

1.6

1

9-0.05

9-0.10

16

1.6

9+0.2

9+0.4

49

3.2

32

22

16

8

3.2

49

69

A

A

Technical drawing of a mechanical part, showing a cross-section A-A and a top view.

Cross-section A-A:

- Overall length: 22
- Overall diameter: $\phi 28$
- Central hole diameter: $\phi 24.5$
- Inner hole diameter: $\phi 10^{+0.049}_{+0.013}$
- Small hole diameter: $2-\phi 5.5$
- Surface finish: 3.2
- Dimensional tolerances: $9^{+0.05}_{-0.10}$, $9^{+0.2}_{+0.4}$
- Feature control frame: 0.10 A
- Feature control frame: 0.03 A
- Feature control frame: 0.02 A

Top View:

- Overall width: 69
- Overall height: 32
- Central hole diameter: 49
- Small hole diameter: 16
- Surface finish: 3.2
- Dimensional tolerances: 22 , 16 , 8

6.3

A—A

2- $\phi 10$

2- $\phi 5.5$

$\phi 24.5$

$\phi 10^{+0.049}_{+0.013}$

$\phi 28$

0.03 A

0.10 A

0.02 A

3.2

1.6

1

9-0.05

9-0.10

16

1.6

9+0.2

9+0.4

49

3.2

32

22

16

8

3.2

49

69

A

A

6.3

A—A

2- $\phi 10$

2- $\phi 5.5$

$\phi 24.5$

$\phi 10^{+0.049}_{+0.013}$

$\phi 28$

0.03 A

0.10 A

0.02 A

3.2

1.6

1

9-0.05

9-0.10

16

1.6

9+0.2

9+0.4

49

3.2

32

22

16

8

3.2

49

69

A

A

6.3

A—A

2- $\phi 10$

2- $\phi 5.5$

$\phi 24.5$

$\phi 10^{+0.049}_{+0.013}$

$\phi 28$

0.03 A

0.10 A

0.02 A

3.2

1.6

1

9-0.05

9-0.10

16

1.6

9+0.2

9+0.4

49

3.2

32

22

16

8

3.2

49

69

A

A

6.3

A—A

2- $\phi 10$

2- $\phi 5.5$

$\phi 24.5$

$\phi 10^{+0.049}_{+0.013}$

$\phi 28$

0.03 A

0.10 A

0.02 A

3.2

1.6

1

9-0.05

9-0.10

16

1.6

9+0.2

9+0.4

49

3.2

32

22

16

8

3.2

49

69

A

A

6.3

A—A

2- $\phi 10$

2- $\phi 5.5$

$\phi 24.5$

$\phi 10^{+0.049}_{+0.013}$

$\phi 28$

0.03 A

0.10 A

0.02 A

3.2

1.6

1

9-0.05

9-0.10

16

1.6

9+0.2

9+0.4

49

3.2

32

22

16

8

3.2

49

69

A

A

Technical drawing of a mechanical part, showing a cross-section A-A and a top view.

Cross-section A-A:

- Overall length: 22
- Overall diameter: $\phi 28$
- Central hole diameter: $\phi 24.5$
- Inner hole diameter: $\phi 10^{+0.049}_{+0.013}$
- Small hole diameter: $2-\phi 5.5$
- Surface finish: 3.2
- Dimensional tolerances: $9^{+0.05}_{-0.10}$, $9^{+0.2}_{+0.4}$
- Feature control frame: 0.10 A
- Feature control frame: 0.03 A
- Feature control frame: 0.02 A

Top View:

- Overall width: 69
- Overall height: 32
- Central hole diameter: 49
- Small hole diameter: 16
- Surface finish: 3.2
- Dimensional tolerances: 22 , 16 , 8

Technical drawing of a mechanical part, showing a cross-section A-A and a top view.

Cross-section A-A:

- Overall length: 22
- Overall diameter: $\phi 28$
- Central hole diameter: $\phi 24.5$
- Inner hole diameter: $\phi 10^{+0.049}_{+0.013}$
- Small hole diameter: $2-\phi 5.5$
- Surface finish: 3.2
- Dimensional tolerances: $9^{+0.05}_{-0.10}$, $9^{+0.2}_{+0.4}$
- Feature control frame: 0.10 A
- Feature control frame: 0.03 A
- Feature control frame: 0.02 A

Top View:

- Overall width: 69
- Overall height: 32
- Central hole diameter: 49
- Small hole diameter: 16
- Surface finish: 3.2
- Dimensional tolerances: 22 , 16 , 8

Technical drawing of a mechanical part, showing a cross-section A-A and a top view.

Cross-section A-A:

- Overall length: 22
- Overall diameter: $\phi 28$
- Central hole diameter: $\phi 24.5$
- Inner hole diameter: $\phi 10^{+0.049}_{+0.013}$
- Small hole diameter: $2-\phi 5.5$
- Surface finish: 3.2
- Dimensional tolerances: $9^{+0.05}_{-0.10}$, $9^{+0.2}_{+0.4}$
- Feature control frame: 0.10 A
- Feature control frame: 0.03 A
- Feature control frame: 0.02 A

Top View:

- Overall width: 69
- Overall height: 32
- Central hole diameter: 49
- Small hole diameter: 16
- Surface finish: 3.2
- Dimensional tolerances: 22 , 16 , 8

Technical drawing of a mechanical part, showing a cross-section A-A and a top view.

Cross-section A-A:

- Overall length: 22
- Overall diameter: $\phi 28$
- Central hole diameter: $\phi 24.5$
- Inner hole diameter: $\phi 10^{+0.049}_{+0.013}$
- Small hole diameter: $2-\phi 5.5$
- Surface finish: 3.2
- Dimensional tolerances: $9^{+0.05}_{-0.10}$, $9^{+0.2}_{+0.4}$
- Feature control frame: 0.10 A
- Feature control frame: 0.03 A
- Feature control frame: 0.02 A

Top View:

- Overall width: 69
- Overall height: 32
- Central hole diameter: 49
- Small hole diameter: 16
- Surface finish: 3.2
- Dimensional tolerances: 22 , 16 , 8

Technical drawing of a mechanical part, showing a cross-section A-A and a top view.

Cross-section A-A:

- Overall length: 22
- Overall diameter: $\phi 28$
- Central hole diameter: $\phi 24.5$
- Inner hole diameter: $\phi 10^{+0.049}_{+0.013}$
- Small hole diameter: $2-\phi 5.5$
- Surface finish: 3.2
- Dimensional tolerances: $9^{+0.05}_{-0.10}$, $9^{+0.2}_{+0.4}$
- Feature control frame: 0.10 A
- Feature control frame: 0.03 A
- Feature control frame: 0.02 A

Top View:

- Overall width: 69
- Overall height: 32
- Central hole diameter: 49
- Small hole diameter: 16
- Surface finish: 3.2
- Dimensional tolerances: 22 , 16 , 8

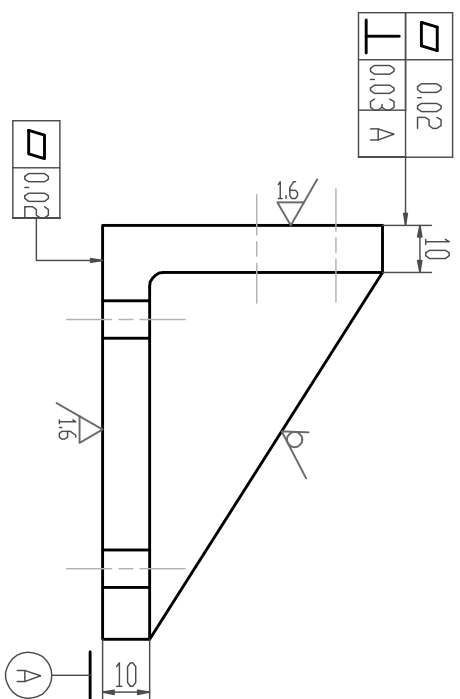
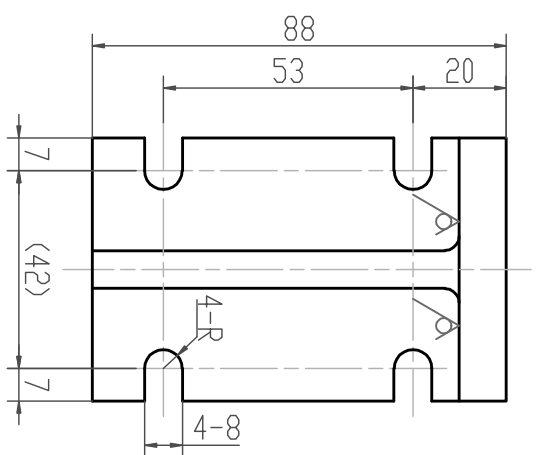
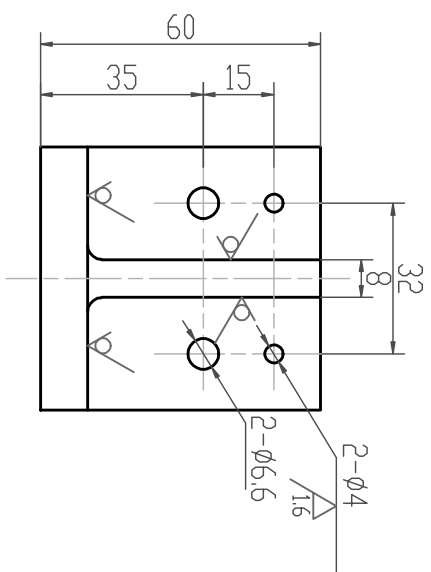
Technical drawing of a mechanical part, showing a cross-section A-A and a top view.

Cross-section A-A:

- Overall length: 22
- Overall diameter: $\phi 28$
- Central hole diameter: $\phi 24.5$
- Inner hole diameter: $\phi 10^{+0.049}_{+0.013}$
- Small hole diameter: $2-\phi 5.5$
- Surface finish: 3.2
- Dimensional tolerances: $9^{+0.05}_{-0.10}$, $9^{+0.2}_{+0.4}$
- Feature control frame: 0.10 A
- Feature control frame: 0.03 A
- Feature control frame: 0.02 A

Top View:

- Overall width: 69
- Overall height: 32
- Central hole diameter: 49
- Small hole diameter: 16
- Surface finish: 3.2
- Dimensional tolerances: 22 , 16 , 8

[illegible]

